

# MICRO-STRIP PATCH ANTENNA PERFORMANCE ENHANCEMENT BY DOUBLE LAYER METAMATERIAL SUPERSTRATE

**MUDE SREENIVASULA, K.VANISREE, R.Anuja,**

Professor, Associate Professor, Assistant professor,  
Department of ECE,

Samskruti College of Engineering and Technology, Ghatkesar.

***Abstract: A metamaterial antenna operating at a frequency of five in this article. Eight GHz are given. The superstrate cover of the metamaterial functions as a mirror that focuses EM radiation on the odd houses of the metamaterial, enhancing the efficiency of the patch antenna alongside its defense against body conditions. The proposed metamaterial lens consists of a double layer with a 9-through-nine cut-ring resonator matrix (SRR) that is located over a rectangular sample fed patch that resonates at 5. Eight GHz. Eight GHz. The type increases the gain and guidance of a simple patch antenna to 7 dB. The simulation results of the proposed antenna are presented in this letter and addressed.***

***Keywords: Metamaterial (MTM), Split Ring Resonator (SRR).***

## 1. INTRODUCTION

An overwhelming boom in the area of telecommunications has contributed to substantial desires and has culminated in the main antennas equipment exchange, depending on the frequency, statistical charge or range of transmission.

The antenna is one of the highest components in the wireless communication networks, as the antenna's overall output alone will severely influence the overall performance of the whole device. The design objective of an antenna is periodically controlled by the requirements given by the skipper. Many implementations suggest that the antenna must be compatible and that it may have an excessive orientation during transmission. Those specifications, namely high guidance, are the key trends among antennas and typically offer engineers working in this field a marvelous mission. Traditional antenna technology requires different radiating elements to produce the antenna array[1] to achieve high directivity. However, such a configuration of a frame includes a complicated feed network and requests that a few antenna considerations be held well. Due to the fact that a malfunctioning antenna factor of one or more can also sometimes have serious consequences on the overall efficiency of the antenna system, different exciting responses were suggested to improve the Patch Antenna Directiveness: the main was used to alter the antenna parameter using the DGS approach and the second proposed these days was modified to s

More recently, a new approach is being suggested to increase the antenna's directivity mainly focused on the usage of artificial substances such as left-over metamaterials[4]. These modern types, consisting of periodic unit frameworks compactly crowded into a strong tissue, open the door to look at some wonderful homes that cannot be done with natural materials.

Most study has been carried out to achieve the high antenna directivity using metamaterialsystems[5–12]. MTMs may be produced utilizing different methods, including photonic cristal [9], electromagnetic band gap [12-13], selective surface frequency (FSS) [10-11] or other periodic artificial fabrics engineered to have a low 0 refractive index [12-13]. Especially, horrible null or near zero index refractive metametrics are used to create a possible packaging of several Wh. Those are, for instance, best lens [14], clocking invisibility [15], and microwave gadget miniaturization [16].

In this paper we have given a metamaterial antenna with 5.8 GHz WLAN program. The superstrate double-layered metamaterial used in this layout is constructed by means of a cut-off ring resonator (SRRs), which was first developed with Pendry et al. in 1999[17] to achieve poor permeability in a positive frequency range. This element's most enticing attribute is its capacity to view a quasi-static resonant frequency at wavelengths that are far wider than its own duration. we've investigated the effect of metamaterials Radom on the directivity, benefit and bandwidth of the antenna by way of the use of CST Microwave studio. it's far observed that by using optimizing the separation distance between the antenna and the double layer metamaterialsuperstrate the directivity of the antenna has been increased via 7 dB.


## **2. METAMATERIAL ANTENNA DESIGN**

### **2.1 Presentation of Metamaterial antenna**

Metamaterials are typically developed in order to organize a set number of tiny spreaders or openings in a normal range during space place, thereby achieving a perfect electro-magnetic conduct of bulk. The preferred assets are also something that is not often clearly noticed (bad refractive index, near-zero index, and so forth.). Metamaterials have changed from being merely a scientific theory over the past 10 years to being a topic of proven and commercialized programmes. The use of electrolysally tiny dispersors or holes will prolong 3-dimensional metamaterials into a dimension pattern on a floor or interface. For several programs the floor model of a metamaterial was called metasurface; metasurfaces can be found in the vicinity of metamaterials. Metamaterial antenna is a class of antennas which use metamaterial to miniature an antenna structure and boost its efficiency. The metamaterial antenna is a category that uses less body space than full 3-dimensional metamaterial structures. Their motive is to disperse power into an undisturbed field as for some electromagnetic radiated information. It comprises an MTM superstrate cover over a point of reference.

The MTM superstratum activity is described by the concentration of the distributed radiation from the patch due to the above MTM superstrate cowl. This role improves the advantage and guidance of the patch antenna.

This type of antenna with a coating of metamaterial is often referred to as a resonant cavity antenna composed usually of one or two surfaces. The metamaterial, ground aircraft and an excitation provision are situated in the cavity. The single planes are divided by the height of the cavity ( $H$ ). This hollow space is also characterized by its start ( $L_{cav}$ ). The antenna built must be finite

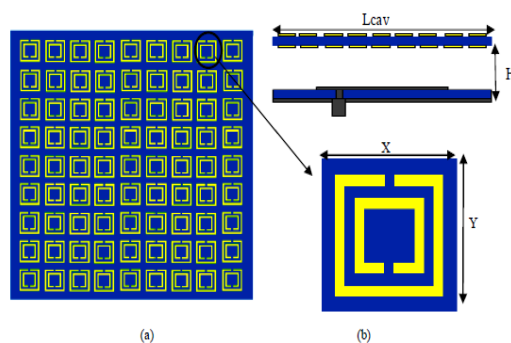

**Fig. 1.** Patch MMT double layer antenna. (a) top and front view of u

### 3 SIMULATED RESULTS AND DISCUSSION


The reflection coefficient as compared to the patch antenna frequency with and without the dual-level MTM superstrate is presented in Figure 2. The discernment reveals that the patch antenna itself does not work so well while the MTM superstrate double-level is not now used. Good resonance in hollow space enhances the match and resonant MTM antenna and works correctly over a fair 5.eight GHz center-frequency array. The dual layer MTM antenna is in outstanding match with a back loss of about -33 dB for the 5.eight GHz Resonance Frequency relative to a personal comparison antenna of -12 dB.

The antenna directivity with and without the superstrate MTM double layer as seen in Figure 3. It is far noticeable that, without using the metasurface, the microstrip antenna directivity covered by the double layer MTM superstrate is better than the antenna. On the central frequency of five.eight GHz, the maximal directivity achieved is 7.2 dB (without double layer superficial metamaterial), and 14.1 dB (with double-layer superficial metameter) that is around 7 dB of growth. This illustrates that the proposed double layer MTM has a brilliant influence on the radiation power change in the standard 0.five $\beta$  cavity.


In comparison to the reference antenna on the 5.eight frequency resonance frequency, the simulated second E-plane and H-aircraft radiation pattern of the double MTM superstratum loaded antenna is seen in Discern 3. We will investigate that the primary lobe is as anticipated against the superb z-axis (propagation course), and that the back-lobe stage is reduced by a load

of double layer MTM superstrate and broad side level is increased. It is evident from this plot that the charge of an MTM superstrate-based microstrip antenna has a crucial impact on the decrease of the width of the -2 dB beam, which in the E plan is decreased from 28, three° to


104°, and in the H plan, from 30.4° to 83.5°.

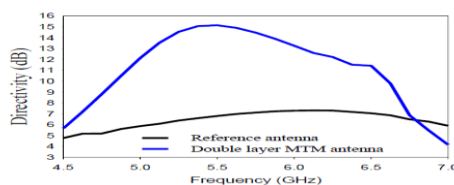

**Fig. 3.** Directivity of the patch antenna with and without double MTM superstrate.

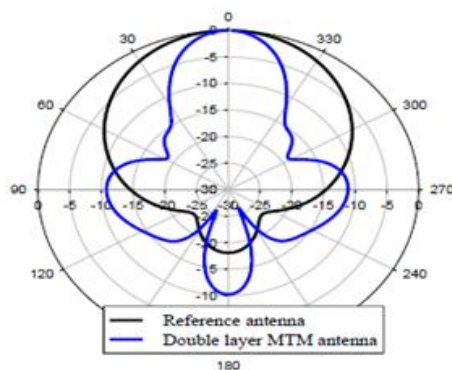

(a)

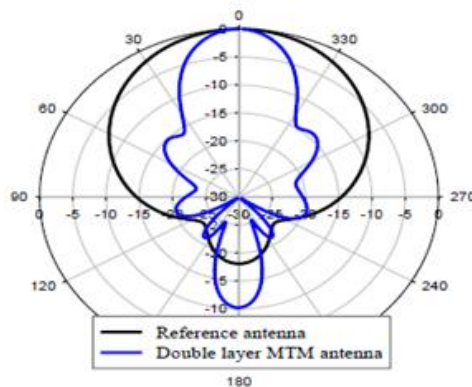

(b)

**Fig. 4.** Built 5,8 GHz antenna pattern of radiation with and without an MTM superstrate of the double layer: (a) E-plan radiation pattern (b) E-plan radiation pattern

#### 4. CONCLUSION

The findings are good and the structure allowed us to increase the guidance of the antenna patch in the hobby frequency range by a value of 7 dB. This arrangement not only raises the patch's

directionality but also other properties, and the double layer MTM antenna suits quite well with the reverse lack of around -33 dB of the resonance frequency of 5.eight GHz relative to a reference antenna, which is -12 dB, the metasurface Antenna HPBW is narrowed to twenty-eight. In conclusion, the double layer MTM superstrate reflects upon the radiation power of the patch antenna and thus allows possible the enhancement of the positive characteristics of the reference part. Therefore the architecture of such antennas is an essential necessity in order to transcend the restricting parameters of the conventional antennas, we trust that similar concepts may also be used on various forms of planar antennas and arrays.

## REFERENCES

- [1] *D.Nascimento, J. da, S. Lacava: Design of arrays of linearly polarized patch antennas on an FR-4 substrate. IEEE Antennas PropagMag.pp.12–22 (2015).*
- [2] *X . Tang, H. Wong, Y. Long, Q .Xue, KL .Lau:Circularly polarized shorted patch antenna on high permittivity substrate with wideband. IEEE Trans Antennas Propag.pp. 1588–92 (2012).*
- [3] *H. Nakano, M. Ikeda, K. Hitosugi, and Yamauchi: A spiral antenna sandwiched by dielectric layers. IEEE Trans. Antennas Propag.vol. 52.no. 6 (2004).*
- [4] *D. Li, Z. Szabo, X. Qing, E. P. Li, and Z. N. Chen : A high gain antenna with an optimized metamaterial inspired superstrate. IEEE Trans. Antennas Propag.vol.60, no. 12, pp. 6018–6023 (2012).*
- [5]*U.kumar, D. K. Upadhyay, B. L. Shahu :Improvement of performance parameters of rectangular patch antenna using metamaterial. IEEE International Conference On Recent Trends In Electronics Information Communication Technology. pp. 20-21 (2016).*
- [6]*S. Gautam, A. Agrawal : Directivity Improvement of Patch Antenna using Metamaterial, Symposium on Colossal Data Analysis and Networking (CDAN). (2016).*
- [7]*J. W. Jayasinghe, J. Anguera, D. N. Uduwaw: A high-directivity microstrip patch antenna design by using genetic algorithm optimization. Progress In Electromagnetics Research C, Vol. 37,131–144 (2013).*
- [8]*Z. Xiao, J. Yao,S. Yin: High-Directivity Antenna Array Based on Artificial Electromagnetic Metamaterials with Low Refractive Index,Corporation International Journal of Antennas and Propagation, Hindawi Publishing. pp. 294-598 (2015).*
- [9]*H. D. Yang, N. G. Alexopoulos , E. Yablonovitch :Photonic band-gap materials for high-gain printed circuit antennas. IEEE Trans Antennas and Propag, vol. 45, no. 1, pp. 185-187 (1997).*
- [10] *B. Temelkuran, M. Bayindir, E. Ozbay et al: Photonic crystalbased resonant antenna with a very high directivity. Journal of Applied Physics. vol. 87, no. 1, pp. 603–605, (2000)*
- [11] *A. R. Weily, L. Horvath, K. P. Esselle, B. C. Sanders, and T. S. Bird : A planar resonator antenna based on a woodpile EBG material. IEEE Transactions on Antennas and Propagation.vol. 53, no. 1, pp. 216–223 (2005).*

- [12] S. Enoch, G. Tayeb, P. Sabouroux, N. Guerin, and P. Vincent : A metamaterial for directive emission. *Physic Review Letters*.vol. 89, no. 21, pp. 213902-1–213902-4 (2002).
- [13]R Q. Wu, P. Pan, F.-Y.Meng, L.-W. Li, and J. Wu: A novel flat lens horn antenna designed based on zero refraction principle of metamaterials.*AppliedPhysics : Materials Science and Processing*.vol. 87, no. 2, pp. 151–156 (2007).
- [14]J.B. Pendry: *Negative Refraction Makes a Perfect Lens*. *Physical Review Lett* 85, pp. 3966-3969 (2000).
- [15]W. Cai, U. K. Chettiar, A. V. Kildishev, V. M. Shalaev : *Optical cloaking with metamaterials* .*Nat.Photon* 1, pp. 224 (2007).
- [16]R. Marqués, F. Martín, and M. Sorolla, :*Metamaterials with Negative Parameters: Theory, Design, and Microwave Application*. John Wiley, New York (2008).
- [17]J. B. Pendry, A.J. Holden, D.J. Robbins, and W. J. Stewart : *Magnetism from conductors and enhanced nonlinear phenomena*. *IEEE Trans. Microwave Theory, Tech*, 47 pp. 2075-2084 (1999).
- [18]D. R. Smith, W. Padilla, D.C. Vier, S.C. Nemat-Nasser, S. Schultz : *Composite Medium with Simultaneously Negative Permeability and Permittivity*. *Phys. Rev. Lett.* 84 pp.4184 (2000).